

Hollo-Bolt® by Lindapter®

Installation is quickly carried out by inserting into pre-drilled steel and tightening with a torque wrench. Independent approvals include ICC-ES seismic accreditation, the Los Angeles Research Report and CE Mark.



* See page 40 for details.




Hollo-Bolt HCF
(High Clamping Force)

Standard Hollo-Bolt

Hollo-Bolt is the original and strongest HSS expansion bolt. It is ICC-ES and LARR approved for all Seismic Design categories (SDC) A through F, in compliance with the International Building Code.

- Fast, cost saving installation from one side.
- For square, rectangular and circular hollow sections.
- High resistance to tensile and shear loads.
- High Clamping Force design (sizes 5/8" and 3/4").

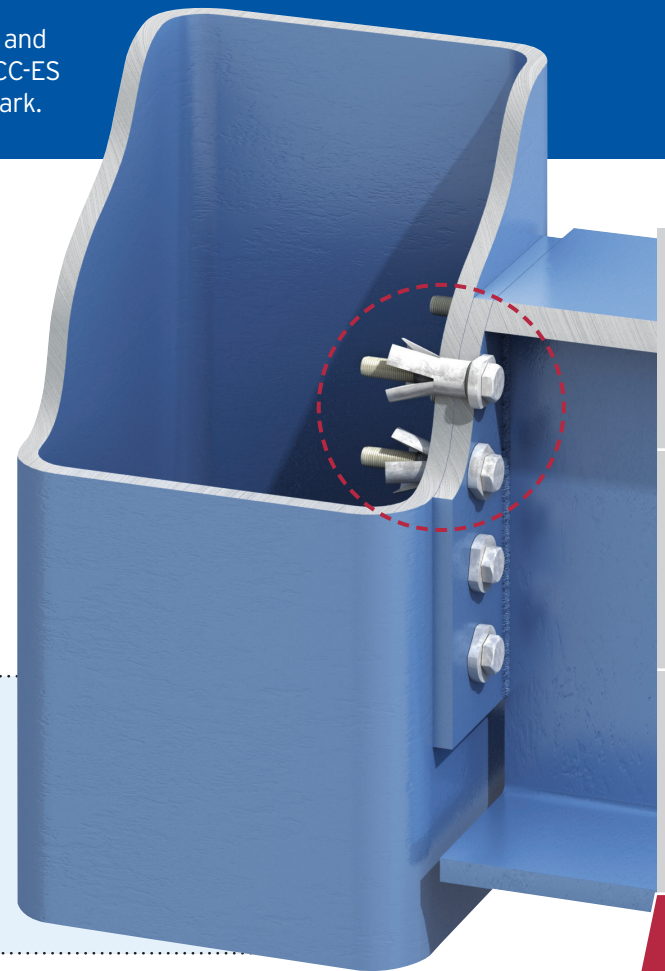

GIRDER CLAMPS

RAIL CONNECTIONS

LIFTING POINTS

HOLLO-BOLT

FLOOR CONNECTIONS

PIPE SUPPORTS

FAQS & CASE STUDIES

Hollo-Bolt Options

Hollo-Bolts are available in a range of head types for a variety of architectural finishes...

		Head Variants		
		HEXAGONAL Normal visible protrusion	COUNTERSUNK (HEAD) Minimal visible protrusion	FLUSH FIT Zero visible protrusion
Sizes Available	5/16"	✓	✓	✓
	3/8"	✓	✓	✓
	1/2"	✓	✓	✓
	5/8" High Clamping Force	✓	✓	-
	3/4" High Clamping Force	✓	-	-
Corrosion Protection	Zinc Plated plus JS500	✓	✓	✓
	Hot Dip Galvanized	✓	-	-
	Sheraplex	✓	✓	✓
	Stainless Steel	✓	✓	✓



Sizes 5/8" and 3/4", known as the Hollo-Bolt HCF, feature a High Clamping Force mechanism to produce three times more clamping force than the same sized product without the mechanism. The significance of clamping force to achieve a high strength connection is demonstrated on pages 38 and 39.



Hollo-Bolt Clamping Force

Lindapter Hollo-Bolts are available in two versions; the original standard design for general hollow section connections and the larger sized High Clamping Force (HCF) for higher strength structural connections.


Standard Hollo-Bolt

A typical connection is made by inserting the Hollo-Bolt into the pre-drilled holes of the fixture and hollow section. As the bolt head is tightened, the cone is pulled up the bolt thread, causing the sleeve to expand until the cone locks the sleeve against the hollow section's inner wall.

At full tightening torque, a clamping force is established between the fixture and the steel section to form a secure connection. Once installed, only the head and the collar are visible.

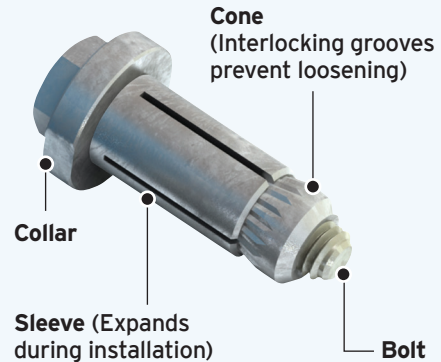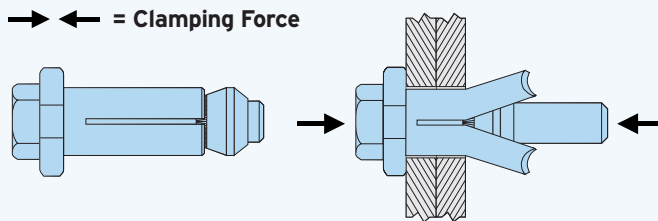

See how to install Hollo-Bolt on page 42 or watch the video on Lindapter's website.





Sizes 5/16", 3/8" and 1/2"


Hollo-Bolt HCF

By working closely with Structural Engineers and Steel Fabricators, Lindapter identified the need for the larger 5/8" and 3/4" Hollo-Bolts to have an increased clamping force suitable for higher strength structural connections. This led to Lindapter's invention of the High Clamping Force (HCF) design, optimized for superior performance.

The HCF mechanism consists of a special rubber washer that compresses during installation to significantly increase the clamping force between the connecting steel, thereby reducing displacement to achieve a higher strength connection. See page 39 for more information.

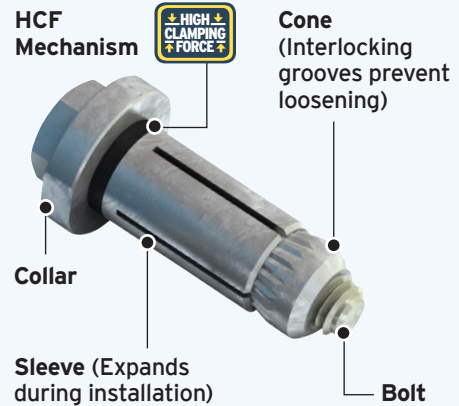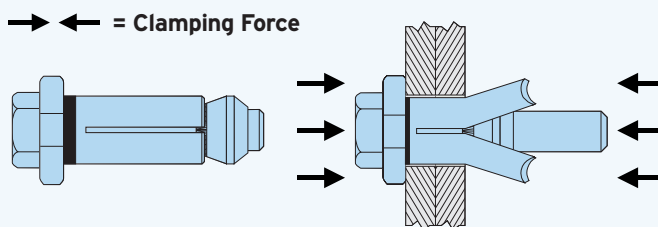

See how to install Hollo-Bolt on page 42 or watch the video on Lindapter's website.




Sizes 5/8" and 3/4"

Hollo-Bolt Clamping Force

The Hollo-Bolt HCF is optimized for high strength structural connections and features a High Clamping Force (HCF) mechanism. The graphs below compare the performance of a Hollo-Bolt HCF and an expansion bolt of the same size without the mechanism.

Clamping Force for Hollo-Bolt HCF (size 3/4")

Graph for illustration purposes only, see pages 40 and 41 for connection design.

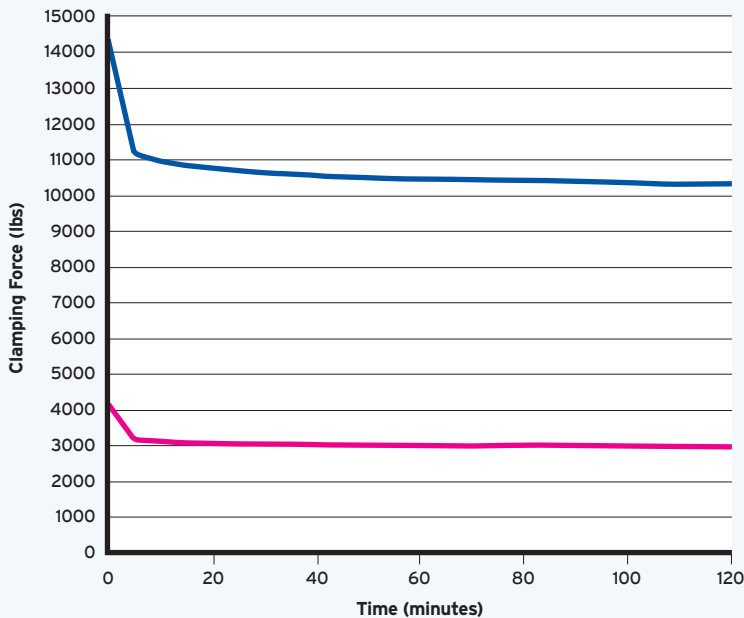

Hollo-Bolt HCF (With Mechanism)
Hot Dip Galvanized, Size 2


(Without Mechanism)
Hot Dip Galvanized, Size 2

Typical Performance Increase

As with any structural bolt, immediately after installation the bolt relaxes until a typical clamping force is reached. Typical clamping force of the size 3/4" Hollo-Bolt HCF is over **three and a half times higher** than the same sized product without the HCF mechanism. This results in a more secure connection and a greater force that has to be overcome before displacement begins.

Connection Load vs Ply Displacement for Hollo-Bolt HCF (size 3/4")

Graph for illustration purposes only, see pages 40 and 41 for connection design.

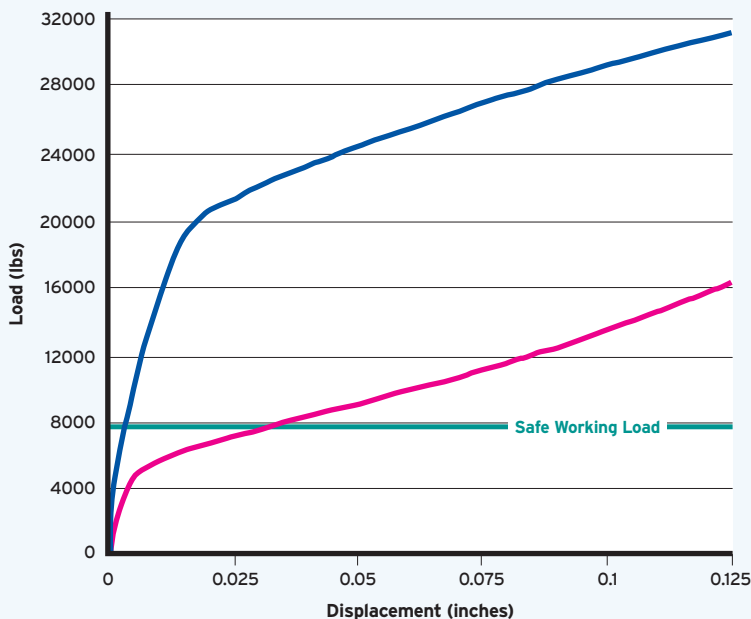

Hollo-Bolt HCF (With Mechanism)
Hot Dip Galvanized, Size 2

(Without Mechanism)
Hot Dip Galvanized, Size 2

Typical Performance Increase


This graph highlights the significance of increased clamping force. The blue curve demonstrates the superior performance of the Hollo-Bolt HCF in contrast to 3/4" sized products without Lindapter's unique mechanism. At Safe Working Load, displacement (movement in the connection) is minimized when using the Hollo-Bolt HCF for a safer and more secure connection.

Hollo-Bolt Allowable Loading


Hollo-Bolt is the original and strongest HSS expansion bolt. It is ICC-ES and LARR approved for all Seismic Design categories (SDC) A through F, in compliance with the International Building Code.

LRFD and ASD Methods

The Hollo-Bolt LRFD and ASD Design Strengths (taken from ESR 3330) are to be used only when designing a bolted connection to AISC 360, AISC 341 and AISI S-100 as referenced in Section 2205 of the IBC.



(Hexagonal head, HDG finish only)

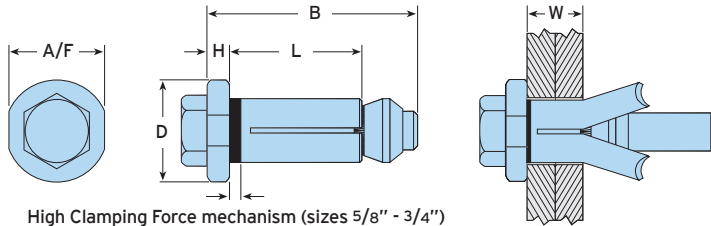

High Clamping Force mechanism (sizes 5/8" - 3/4")

Download the full Evaluation Report ESR-3330 from www.LindapterUSA.com



Allowable Loading																
Static and Seismic Design Categories A, B, C								Seismic Design Categories D, E, F								
Product Code	Bolt B	Max. Clamping Range W	Sleeve Length L	Collar			Tightening Torque ft lb	LRFD Method		ASD Method		LRFD Method		ASD Method		
				Height H	Ø D	A/F		Tensile lbs	Shear lbs	Tensile lbs	Shear lbs	Tensile lbs	Shear lbs	Tensile lbs	Shear lbs	
LHBM08#1	5/16" x 2"	1/4" - 7/8"	13/16"	3/16"	7/8"	3/4"	17	3775	3215	2340	2000	3305	2675	2045	1665	
LHBM08#2	5/16" x 2 3/4"	7/8" - 1 5/8"	1 15/16"	3/16"	7/8"	3/4"	17	3775	3215	2340	2000	3305	2675	2045	1665	
LHBM08#3	5/16" x 3 9/16"	1 5/8" - 2 3/8"	2 11/16"	3/16"	7/8"	3/4"	17	3775	3215	2340	2000	3305	2675	2045	1665	
LHBM10#1	3/8" x 2 3/16"	5/16" - 7/8"	1 3/16"	1/4"	1 1/8"	1 5/16"	33	6160	5485	3820	3415	5485	4565	3395	2830	
LHBM10#2	3/8" x 2 3/4"	7/8" - 1 5/8"	1 7/8"	1/4"	1 1/8"	1 5/16"	33	6160	5485	3820	3415	5485	4565	3395	2830	
LHBM10#3	3/8" x 3 9/16"	1 5/8" - 2 3/8"	2 5/8"	1/4"	1 1/8"	1 5/16"	33	6160	5485	3820	3415	5485	4565	3395	2830	
LHBM12#1	1/2" x 2 3/8"	5/16" - 1"	1 3/8"	1/4"	1 1/4"	1 3/16"	59	8545	7485	5305	4675	7465	6250	4630	3890	
LHBM12#2	1/2" x 3 5/32"	1" - 1 13/16"	2 1/4"	1/4"	1 1/4"	1 3/16"	59	8545	7485	5305	4675	7465	6250	4630	3890	
LHBM12#3	1/2" x 4"	1 13/16" - 2 3/4"	3 1/8"	1/4"	1 1/4"	1 3/16"	59	8545	7485	5305	4675	7465	6250	4630	3890	
Hollo-Bolt HDG	LHBM16#1	5/8" x 3"	1/2" - 1 1/8"	1 5/8"	5/16"	1 1/2"	17 1/16"	140	13915	11645	8635	7285	13330	9780	8270	6090
	LHBM16#2	5/8" x 4"	1 1/8" - 2"	2 1/2"	5/16"	1 1/2"	17 1/16"	140	13915	11645	8635	7285	13330	9780	8270	6090
	LHBM16#3	5/8" x 4 3/4"	2" - 2 13/16"	3 5/16"	5/16"	1 1/2"	17 1/16"	140	13915	11645	8635	7285	13330	9780	8270	6090
	LHBM20#1	3/4" x 3 9/16"	1/2" - 1 5/16"	1 15/16"	3/8"	2"	1 13/16"	221	19985	18390	12410	11490	19355	15330	12005	9555
	LHBM20#2	3/4" x 4 3/4"	1 5/16" - 2 3/8"	3"	3/8"	2"	1 13/16"	221	19985	18390	12410	11490	19355	15330	12005	9555
	LHBM20#3	3/4" x 5 7/8"	2 3/8" - 3 3/8"	4"	3/8"	2"	1 13/16"	221	19985	18390	12410	11490	19355	15330	12005	9555

Hollo-Bolts can be used on a variety of steel hollow sections and shapes. Failure of the section, particularly on those with thin walls and a wide chord face, could occur at a lower figure and its strength should be checked by a qualified Structural Engineer.

ICC-ES approved use

ICC-ES is North America's leading evaluation service for innovative building products, providing evidence that products meet the requirements of building codes and technical standards. Evaluation report ESR-3330 states:


“Hollo-Bolt fasteners are designed for connecting structural steel to hollow structural section (HSS) steel members and other structural steel elements where access is difficult or restricted to one side only.”

“Hollo-Bolt fasteners may be used to resist wind loads, and seismic loads in Seismic Design categories A through F.”



Hollo-Bolt Safe Working Loads

For connections to secondary steel, please refer to the safe working loads in the tables below:

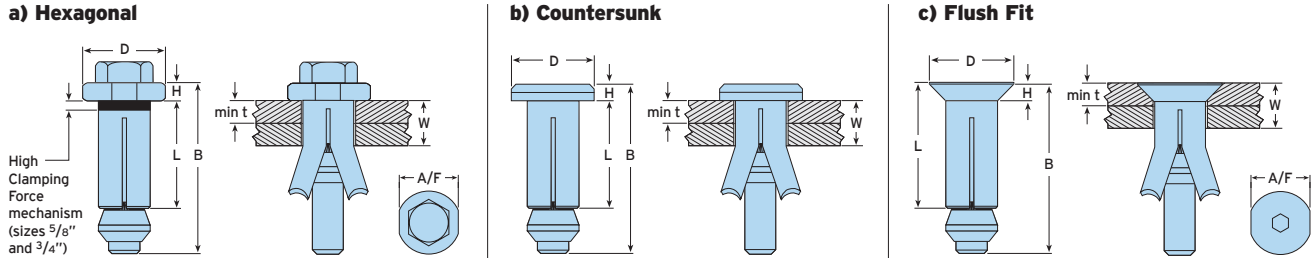

	a) Hexagonal		b) Countersunk		Outer Ply min t	Sleeve Length L	Collar		Tightening Torque ft lb	Safe Working Loads (FOS 5:1)			
	Product Code	Bolt B	Product Code	Bolt B			Clamping Thickness W	Height H		Ø D	A/F	Tensile lbs	Single Shear lbs
	LHBM08#1	5/16" x 2"	LHBCSKM08#1	5/16" x 2"	1/8" - 7/8"	-	13/16"	3/16"	7/8"	3/4"	17	899	1124
	LHBM08#2	5/16" x 2 3/4"	LHBCSKM08#2	5/16" x 2 3/4"	7/8" - 1 5/8"	-	1 5/16"	3/16"	7/8"	3/4"	17	899	1124
	LHBM08#3	5/16" x 3 9/16"	LHBCSKM08#3	5/16" x 3 9/16"	1 5/8" - 2 3/8"	-	2 1/16"	3/16"	7/8"	3/4"	17	899	1124
	LHBM10#1	3/8" x 2 3/16"	LHBCSKM10#1	3/8" x 2"	1/8" - 7/8"	-	13/16"	1/4"	1 1/8"	1 5/16"	33	1910	2248
	LHBM10#2	3/8" x 2 3/4"	LHBCSKM10#2	3/8" x 2 3/4"	7/8" - 1 5/8"	-	1 7/8"	1/4"	1 1/8"	1 5/16"	33	1910	2248
	LHBM10#3	3/8" x 3 9/16"	LHBCSKM10#3	3/8" x 3 9/16"	1 5/8" - 2 3/8"	-	2 5/8"	1/4"	1 1/8"	1 5/16"	33	1910	2248
	LHBM12#1	1/2" x 2 3/8"	LHBCSKM12#1	1/2" x 2 3/16"	1/8" - 1"	-	1 3/8"	1/4"	1 1/4"	1 3/16"	59	2360	3372
	LHBM12#2	1/2" x 3 5/32"	LHBCSKM12#2	1/2" x 3 1/8"	1" - 1 13/16"	-	2 1/4"	1/4"	1 1/4"	1 3/16"	59	2360	3372
	LHBM12#3	1/2" x 4"	LHBCSKM12#3	1/2" x 4"	1 13/16" - 2 3/4"	-	3 1/8"	1/4"	1 1/4"	1 3/16"	59	2360	3372
Hollo-Bolt HCF	LHBM16#1	5/8" x 3"	LHBCSKM16#1	5/8" x 2 3/4"	1/2" - 1 1/8"	5/16"	1 5/8"	5/16"	1 1/2"	1 7/16"	140	4720	6744
	LHBM16#2	5/8" x 4"	LHBCSKM16#2	5/8" x 4"	1 1/8" - 2"	5/16"	2 1/2"	5/16"	1 1/2"	1 7/16"	140	4720	6744
	LHBM16#3	5/8" x 4 3/4"	LHBCSKM16#3	5/8" x 4 3/4"	2" - 2 13/16"	5/16"	3 5/16"	5/16"	1 1/2"	1 7/16"	140	4720	6744
	LHBM20#1	3/4" x 3 9/16"	-	-	1/2" - 1 5/16"	5/16"	1 5/16"	3/8"	2"	1 13/16"	221	7868	8992
	LHBM20#2	3/4" x 4 3/4"	-	-	1 5/16" - 2 3/8"	5/16"	3"	3/8"	2"	1 13/16"	221	7868	8992
	LHBM20#3	3/4" x 5 7/8"	-	-	2 3/8" - 3 3/8"	5/16"	4"	3/8"	2"	1 13/16"	221	7868	8992



Sizes 5/8" and 3/4", known as the Hollo-Bolt HCF, feature a High Clamping Force mechanism to produce three times more clamping force than the same sized product without the mechanism. The significance of clamping force to achieve a high strength connection is demonstrated on pages 38 and 39.

Product Code	c) Flush Fit		Outer Ply min t	Sleeve Length L	Height H	Collar		Tightening Torque ft lb	Safe Working Loads (FOS 5:1)	
	Countersunk Bolt B	Clamping Thickness W				Ø D	Installation Nut A/F		Tensile lbs	Single Shear lbs
LHBFF08#1	5/16" x 2"	3/8" - 1 1/16"	5/16"	1 3/8"	3/16"	1 5/16"	3/4"	17	899	1124
LHBFF08#2	5/16" x 2 3/4"	1 1/16" - 1 3/4"	5/16"	2 1/8"	3/16"	1 5/16"	3/4"	17	899	1124
LHBFF08#3	5/16" x 3 9/16"	1 3/4" - 2 1/2"	5/16"	2 7/8"	3/16"	1 5/16"	3/4"	17	899	1124
LHBFF10#1	3/8" x 2"	1/2" - 1 1/16"	3/8"	1 7/16"	1/4"	1 3/16"	1 5/16"	33	1910	2248
LHBFF10#2	3/8" x 2 3/4"	1 1/16" - 1 3/4"	3/8"	2 1/8"	1/4"	1 3/16"	1 5/16"	33	1910	2248
LHBFF10#3	3/8" x 3 9/16"	1 3/4" - 2 1/2"	3/8"	2 7/8"	1/4"	1 3/16"	1 5/16"	33	1910	2248
LHBFF12#1	1/2" x 2 3/16"	1/2" - 1 3/16"	3/8"	1 5/8"	1/4"	1 5/16"	1 3/16"	59	2360	3372
LHBFF12#2	1/2" x 3 1/8"	1 3/16" - 2 1/32"	3/8"	2 1/2"	1/4"	1 5/16"	1 3/16"	59	2360	3372
LHBFF12#3	1/2" x 4"	2 1/32" - 2 7/8"	3/8"	3 3/8"	1/4"	1 5/16"	1 3/16"	59	2360	3372


Hollo-Bolts can be used on a variety of steel hollow sections and shapes. Safe working loads shown are based on use in A36 structural tube and are applicable to the Hollo-Bolt only in both tension and shear. Failure of the section, particularly on those with thin walls and a wide chord face, could occur at a lower figure and its strength should be checked by a qualified Structural Engineer.

Hollo-Bolt Preparation and Installation

To comply with ICC-ES ESR-3330 Section 4.2 ensure that the holes are drilled into both the fixture and the section according to the drilling guidelines below. Please note that the holes are slightly larger than standard bolt drill diameters to accommodate the sleeve and cone.

Hexagonal and Countersunk


Type		Outer Ply	Drill Diameter Ø	Hole Distances		Edge Distances
Hexagonal	Countersunk	min t	d1	min A	min B	B + C
LHBM08	LHBCSKM08	-	9/16"	1 3/8"	1/2"	> 11/16"
LHBM10	LHBCSKM10	-	3/4"	1 9/16"	9/16"	> 7/8"
LHBM12	LHBCSKM12	-	13/16"	2"	11/16"	> 1"
LHBM16	LHBCSKM16	5/16"	1 1/16"	2 3/16"	13/16"	> 1 5/16"
LHBM20	-	5/16"	1 5/16"	2 3/4"	1"	> 1 5/16"

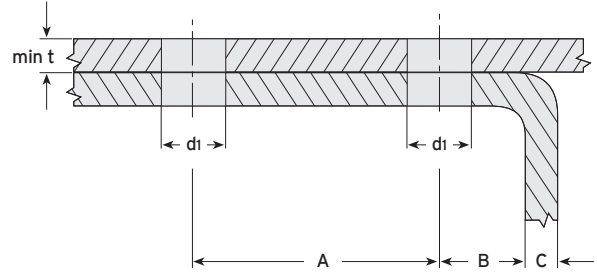

► Sizes 5/8" and 3/4" require outer ply thickness (min t) to be at least 5/16".

How to install...


- 1) Align pre-drilled fixture and section then insert the Hollo-Bolt^{a)}.
- 2) Grip Hollo-Bolt collar with an open ended wrench.
- 3) Using a calibrated torque wrench, tighten the central bolt to the recommended torque^{b)}.

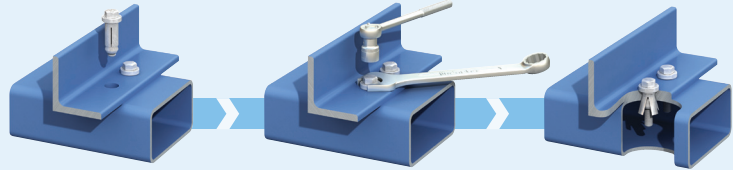

► Watch the Hollo-Bolt installation video at www.LindapterUSA.com


Flush Fit

Type	Outer Ply	Drill Diameter Ø		Countersunk		Hole Distances		Edge Distances
	min t	d1	d2	t1	min A	min B	B + C	
LHBM08FF	5/16"	9/16"	1 1/16"	1/4"	1 3/8"	1/2"	> 11/16"	
LHBM10FF	3/8"	3/4"	1 1/4"	1/4"	1 9/16"	9/16"	> 7/8"	
LHBM12FF	3/8"	13/16"	1 3/8"	5/16"	2"	11/16"	> 1"	

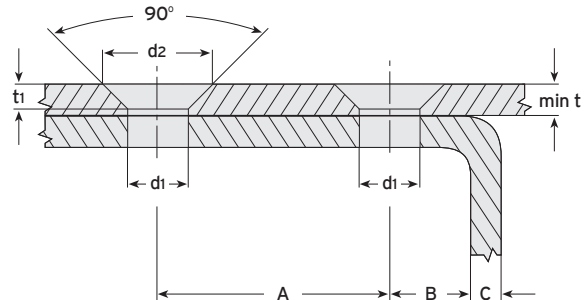

How to install...

- 1) Align pre-drilled fixture and section then insert the Hollo-Bolt^{a)}.
- 2) Apply the installation nut and grip with an open ended wrench.
- 3) Using a calibrated torque wrench, tighten the central countersunk bolt to the recommended torque^{b)}.

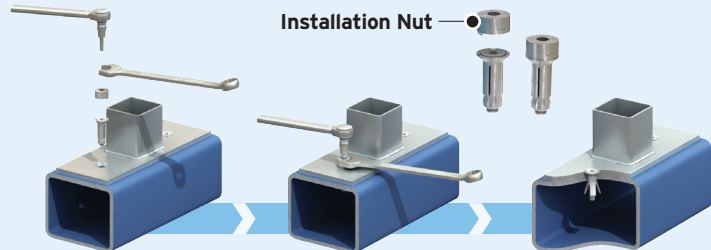

Notes:

- a) Before tightening, ensure that the materials that are to be connected together are touching. See page 41 for tightening torque.
- b) Power tools, such as an impact wrench, may be used to speed up the tightening of the Hollo-Bolt. However, when using power tools always complete the tightening process with a calibrated torque wrench to ensure the correct torque is applied to the Hollo-Bolt.

► For further installation and equipment information please visit www.LindapterUSA.com or contact Lindapter.

Typical Applications for Hollo-Bolt

The Hollo-Bolt is a versatile product that is used in a variety of applications, in a range of industries. Some popular connections are shown below, however these examples show only a few of the possibilities. Please contact Lindapter to discuss your connection requirement.

GIRDER CLAMPS

RAIL CONNECTIONS


LIFTING POINTS

HOLLO-BOLT


FLOOR CONNECTIONS

PIPE SUPPORTS


FAQS & CASE STUDIES

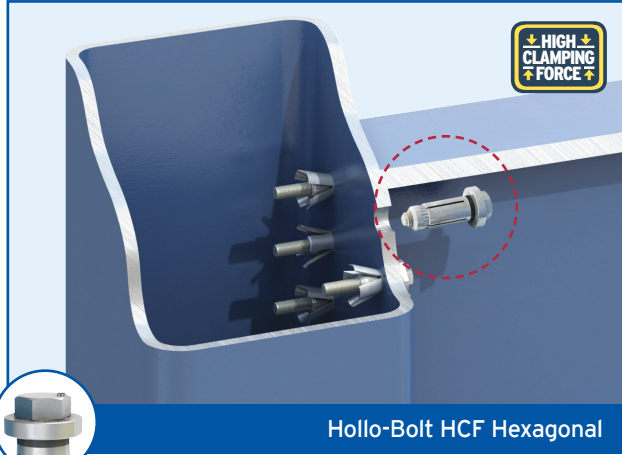


Hollo-Bolt HCF Hexagonal

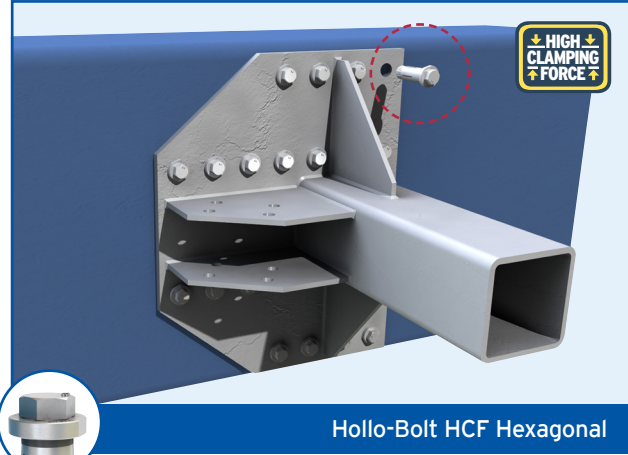


Hollo-Bolt HCF Hexagonal

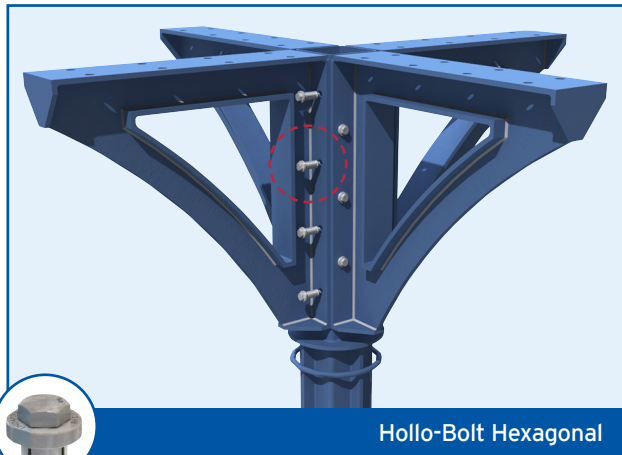


Hollo-Bolt Hexagonal

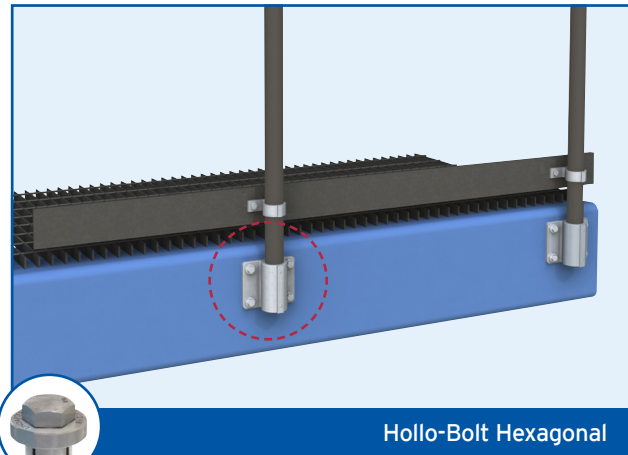

Hollo-Bolt Hexagonal

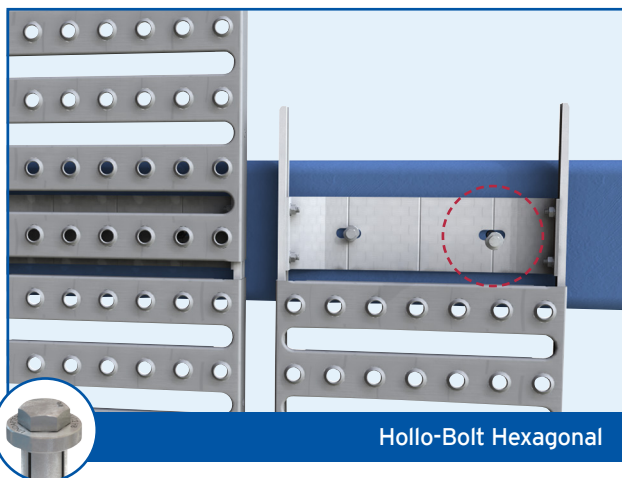





Hollo-Bolt Hexagonal

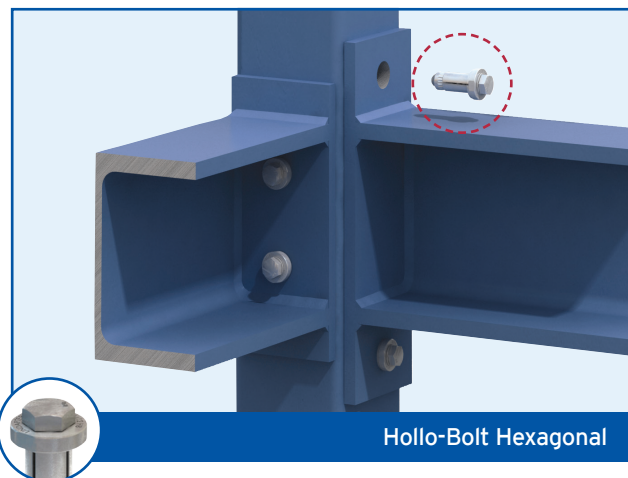


Hollo-Bolt Hexagonal

Typical Applications for Hollo-Bolt

Examples of popular connection arrangements are continued below:

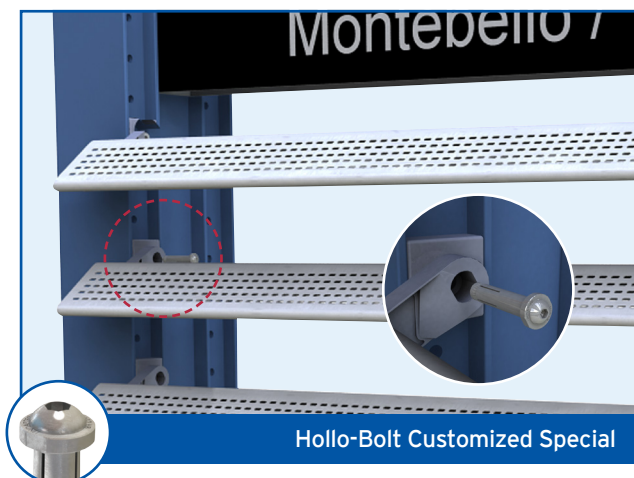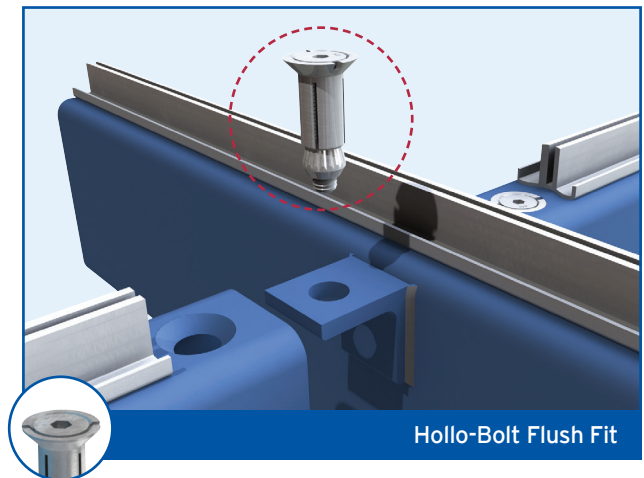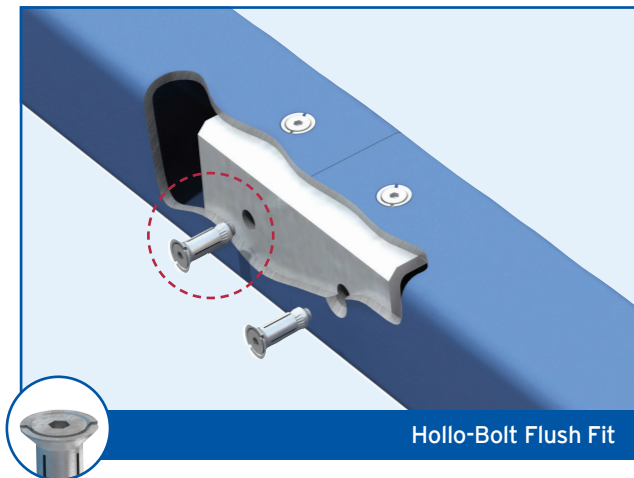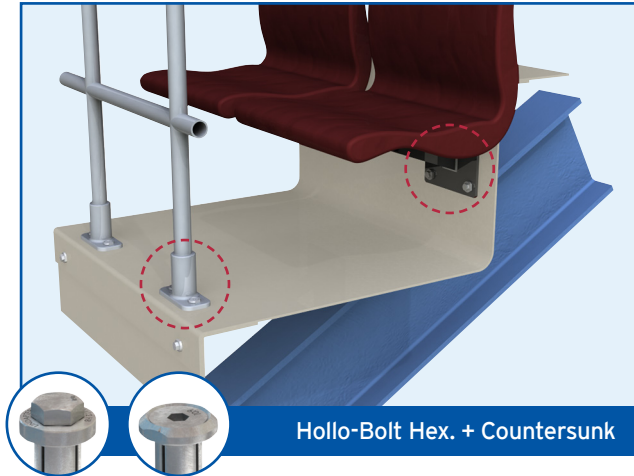




by **lindapter**

Request a Hollo-Bolt brochure for more project examples and Frequently Asked Questions.

For hard copies please email: inquiries@LindapterUSA.com

Or download it from: www.LindapterUSA.com

BROCHURE AVAILABLE NOW!



GIRDER CLAMPS

RAIL CONNECTIONS

LIFTING POINTS

HOLLO-BOLT

FLOOR CONNECTIONS

PIPE SUPPORTS

FAQS & CASE STUDIES